


THE FERRUM RANGE

Excellence in Metal
Roofing & Cladding

info@mrc-group.co.za
www.mrc-group.co.za



'SECRET FIX' INSULATED ROOF SYSTEM WITH FACED INSULATION

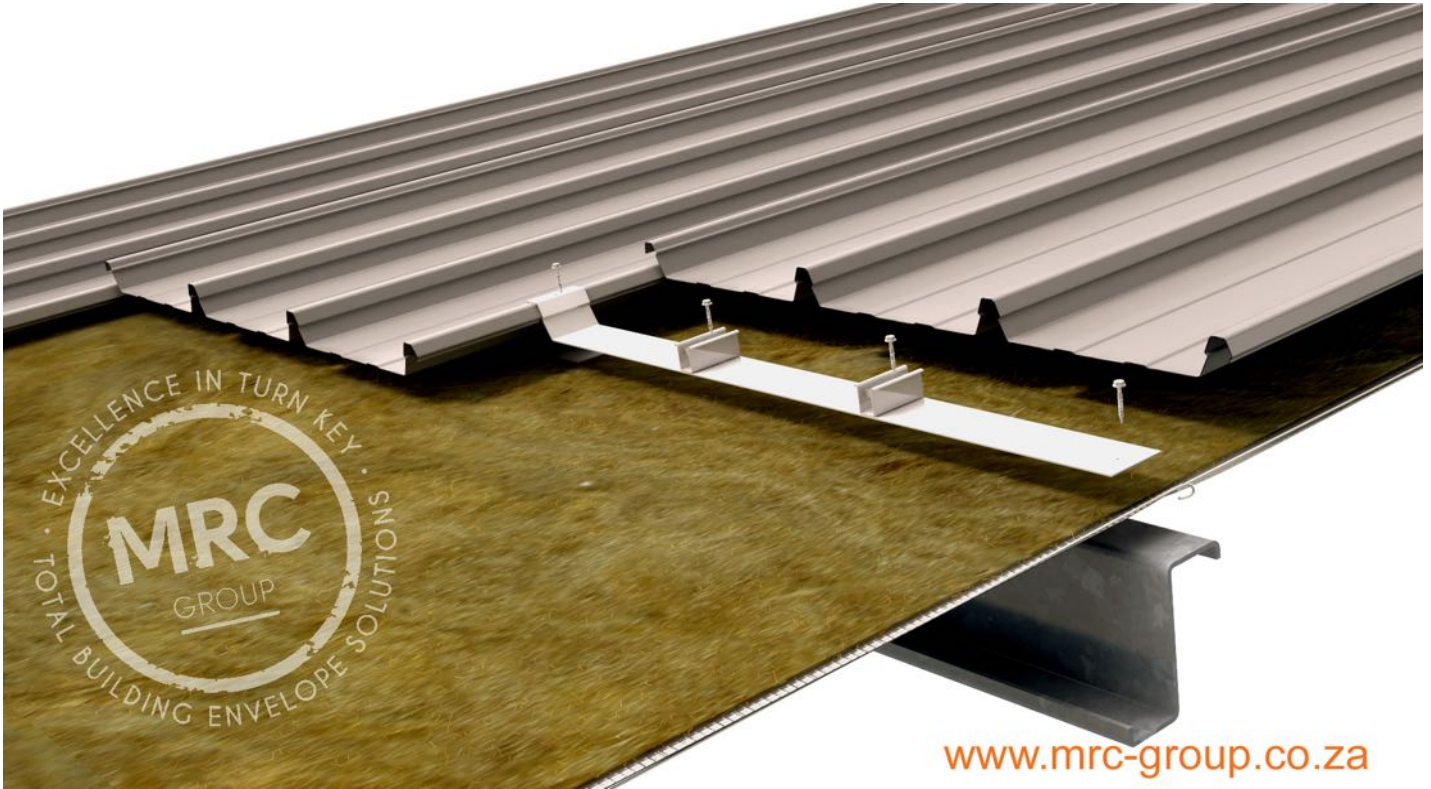

www.mrc-group.co.za

SYSTEM OVERVIEW:

MRC Group's insulated 'Secret Fix' roof system using compressed bulk density faced insulation is the standard form of construction for new build roofs.

The faced bulk density insulation can be supplied in a range of thicknesses, colours and finishes and is supported either by galvanised mesh or straining wire which is installed perpendicular to the steel purlins.

The faced bulk density insulation is compressed between the 'Secret Fix' roof clip and the purlin. Under compression the thermal performance of the insulation is reduced by up to 40% from stated uncompressed technical data.

MRC Group's installed system is backed with the unrivalled single source, Guardian™ System Warranty covering materials, installation & maintenance for the term of the roofing and cladding system.

KEY FEATURES:

- Full range of aluminum and steel 'Secret Fix' roof and cladding systems
- Available R-Value performance up to 1.2 (m².K/W) in its compressed state
- Backed with the up to 20 year Guardian™ System Warranty

Compressed insulation reduces its thermal performance by up to 40%

Please note that the use of compressed insulation thicker than 75mm is **NOT** advised with a 'Secret Fix' Roof System, as it may lead to unclipping of the roof system

JOHANNESBURG – DURBAN – CAPE TOWN

For project specific specifications, CAD Details, Samples or technical assistance please contact our technical department on +27 (0) 861 672 476 or refer to our Technical Brochure available on www.mrc-group.co.za

All Information correct as of the date this document was created 01 April 2015.

© Copyright 2015 MRC GROUP Copying or reproduction of these material are strictly prohibited

Reference number: MRC/FR/SF/IR/001

THE FERRUM RANGE

Excellence in Metal Roofing & Cladding

info@mrc-group.co.za
www.mrc-group.co.za



'SECRET FIX' INSULATED ROOF SYSTEM WITH FACED INSULATION

TECHNICAL DATA:

STRAINING WIRE INSULATION SUPPORT SYSTEM

- 1.6mm galvanised or coated steel wire perpendicularly secured to the purlins at between 300 – 400mm centres

FACED BULK DENSITY INSULATION

- Full range of insulation types & thicknesses available
- Facings include silver foil, white & black
- Fire Classification Class 1 (non-combustible)

R-Value Table for insulation compressed between the clip of the Secret Fix' roof system and the steel purlin

R-Value (m ² .K/W)	0.9	1.2	> 75mm NOT advised with 'Secret Fix' roof system
Glass Wool	50mm	75mm	

i.e. Insulation compressed between purlins & roof sheets will lose up to 40% of the proclaimed uncompressed R-Value

R-Value Table with use of the AshGrid™ Spacer System

R-Value (m ² .K/W)	2.5	3	4	5	6.25
Glass Wool	115mm	135mm	180mm	220mm	280mm
Bracket	115mm	135mm	180mm	220mm	280mm

i.e. a constant cavity thickness does **NOT** compromise the R-Value

WEIGHT OF A TYPICAL INSULATED ROOF SYSTEM


- 1.6mm wire at 300mm centres 0.5 kg / m²
- 135mm roll out insulation 1.7 kg / m²
- 0.55mm Secret Fix / Pierced Fix Roof 6.0 kg / m²
- Total Weight 8.2 kg / m²

ALTERNATIVE OPTIONS TO CONSIDER

- 0.8mm Aluminum Roof System 4.0 kg / m²
- 0.8mm Steel Roof System 9.0 kg / m²

SYSTEM WARRANTY

- Up to 20 year, single source, Guardian™ System Warranty covers Materials, Workmanship & Maintenance

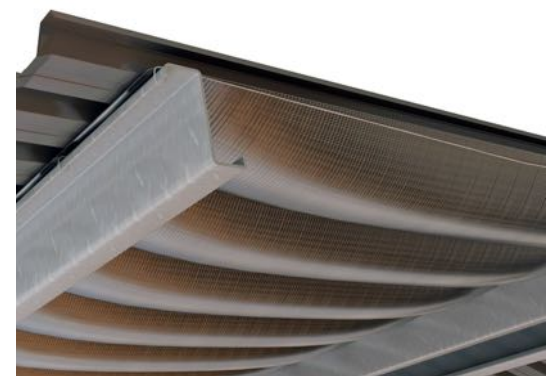

ACCREDITATIONS



JOHANNESBURG – DURBAN – CAPE TOWN

For project specific specifications, CAD Details, Samples or technical assistance please contact our technical department on +27 (0) 861 672 476 or refer to our Technical Brochure available on www.mrc-group.co.za

All Information correct as of the date this document was created 01 April 2015.

© Copyright 2015 MRC GROUP Copying or reproduction of these material are strictly prohibited

Reference number: MRC/FR/SF/IR/001