
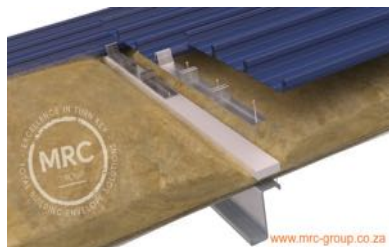
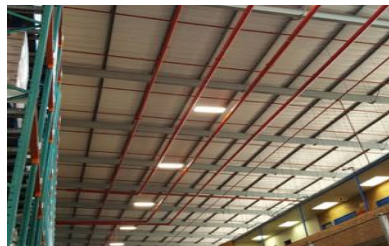


**Offices:**  
 Johannesburg  
 Durban  
 Cape Town

## EXCELLENCE IN INSULATED ROOF SOLUTIONS

- Compressed faced insulation between straining wires and roof sheeting.
- Thickness of insulation ranges from 50 to 100mm. Insulation thicker than 100mm is not advisable without a spacer system.
- Foil, white / coloured facings available.
- Compression of insulation may lose up to 72% of the stated uncompressed thermal performance, therefore these systems may not achieve SANS 10400-XA without additional thermal solutions.

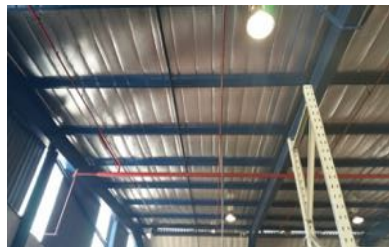

**GUARANTEED TO SAVE YOU MONEY!**

[www.mrc-group.co.za](http://www.mrc-group.co.za)

Email: [info@mrc-group.co.za](mailto:info@mrc-group.co.za)

